

Designing cantilever dimension for low power wireless applications

Md Rabiul Awal¹, Muzammil Jusoh², R. Badlishah Ahmad³, Thennarasan Sabapathy⁴,
M. Najib M. Yasin⁵, Mohd Hafizuddin Mat⁶

¹School of Ocean Engineering, Universiti Malaysia Terengganu (UMT), Malaysia

^{2,4,5}School of Computer and Communication Engineering, Universiti Malaysia Perlis (UniMAP), Malaysia

³Faculty of Informatics and Computing, Universiti Sultan Zainal Abidin (UniSZA), Malaysia

⁶School of Electrical Systems Engineering, Universiti Malaysia Perlis (UniMAP), Malaysia

Article Info

Article history:

Received Sep 20, 2018

Revised Dec 22, 2018

Accepted Jan 11, 2019

Keywords:

Acoustic energy

Acoustic signal

Cantilever displacements

Low power applications

ABSTRACT

This paper presents the effect of cantilever width on the displacement pattern for low power acoustic energy propagation. A single layer cantilever configuration is used to design the harvester with Lead Zirconate Titanate (PZT-5H). The device is designed with $10 \times (1 \text{ to } 10) \times 0.62 \text{ mm}$ dimension. The displacements of the cantilever are obtained through the simulation analysis. The maximum displacements are found of $9.80 \times 10^{-28} \text{ mm}$ with the smallest width while minimum displacement is found from 5 mm width. From the results, it is obvious that, smaller width can result larger displacements, however, rectangular and square cantilever shape can be advantageous for low power applications.

Copyright © 2019 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Muzammil Jusoh,
School of Computer and Communication Engineering,
Universiti Malaysia Perlis (UniMAP),
Kampus Pauh Putra, 02600, Arau, Perlis, Malaysia.
Email: muzammil@unimap.edu.my

1. INTRODUCTION

The Microelectromechanical sensors (MEMS) have wide range of applications due to their flexible characteristics [1, 2]. Their physical geometry is highly advantageous for the applications in micrometer level, however, the geometry pattern can be applied to even meter range structural applications [3], [4]. In fact, numerous example of these pattern similarity can be found even in construction models and can be several hundred meters in length. Hybrid energy harvesting platform can also be integrated with these MEMS [5].

Among micrometer to millimeter range MEMS, cantilever pattern is one of the mostly applied device patterns. Their main applications lied within acoustic signal transmitter and receiver, imaging in atomic force microscopy (AFM) [6]. In recent proposal, cantilever also used for acoustic energy transfer (AET) [7]. For all the cases of applications, the high sensitivity of the device is the key feature [8]. Though, cantilever has significant applications in the low power AET, however, the proper geometry dimension is unavailable for this particular area of interest [9, 10].

From these motivations, in this paper, we investigate the cantilever dimension considering various length, width and thickness. We intend to observe the impact of the different dimensions on the device displacements [11]. Due to the application focus, we limit our investigation to the rectangular shape only. The maximum dimension is considered as, 10 mm in length, 10 mm in width and 0.625 mm in thickness. In addition, we have applied a range of voltage to trace the effect in device behavior according to the existing

literature [12], [13]. In this work, we have considered the rectangular shaped pattern only and extended the observations to the square patterned device.

The reminder of this paper is organized as follows; Section 2 presents the governing equations of the device displacements. Section 3 describes the design parameters of the cantilever in detail. Section 4 discusses the displacement pattern of the cantilever. Lastly, Section 5 concludes this paper with some prospective future agendas.

2. GOVERNING EQUATIONS FOR THE DEVICE DISPLACEMENTS

A cantilever beam with an applied uniform load exhibits the maximum stress as [14],

$$\sigma = \frac{PL}{Z} \quad (1)$$

And maximum deflection as [15],

$$D = \frac{PL^3}{3EI} \quad (2)$$

Where,

P= force,

L= length of the beam,

Z= section modulus,

E= flexural modulus,

I= moment of inertia about bending axis.

For a rectangular shaped cantilever, Z and I can be defined as [16],

$$Z = \frac{bt^2}{6} \quad (3)$$

And,

$$I = \frac{bt^3}{12} \quad (4)$$

Here, b and t are the width and thickness of the cantilever respectively.

It is important to notice that, larger width and thickness compared to the device length, results larger values for the section and flexural modulus and moment of inertia. These values limit the maximum stress and deflection of the device in terms of displacements. Though, higher delivered force can offer higher deformation, however, exceeding the threshold value also may introduce permanent deformations. Hence, the ratio of the length to width and thickness is important to consider in designing.

3. DEVICE DESCRIPTIONS AND MODELING

The device geometry is settled according to the length, width and thickness. However, device length and thickness is considered as unchanged while we have set width values from 1 mm to 10 mm. Thus, varies the device volume as well. The detail descriptions are given in Figure 1 and the following Table 1. Displacements vs. applied voltages as shown in Figure 2.

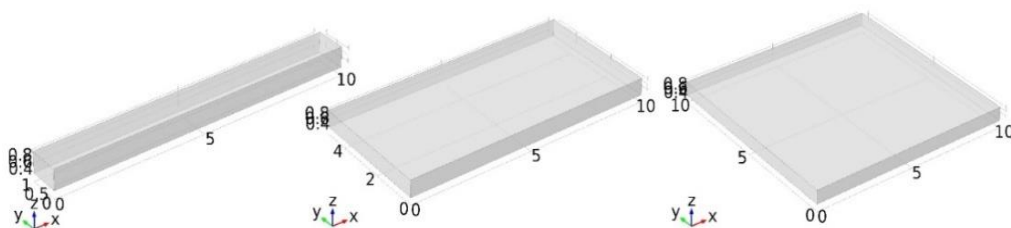


Figure 1. Cantilever design descriptions

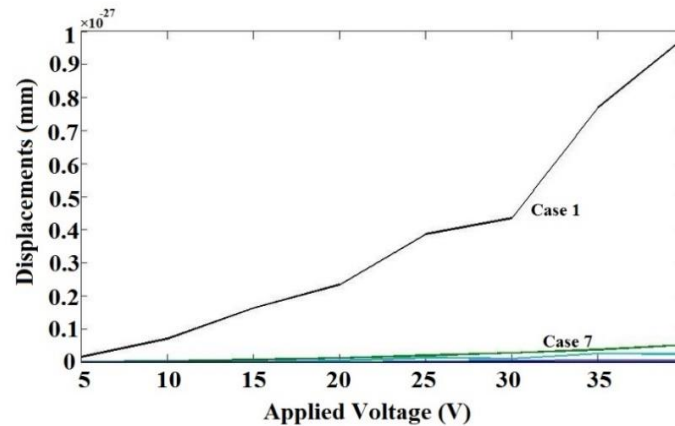


Figure 2. Displacements vs applied voltages

Table 1. Cantilever Dimension Descriptions

Case	Cantilever Dimensions (mm)		Device Volume (mm ³)
	Length	Width×Thickness	
1	10	1×0.62	6.2
2	10	2×0.62	12.4
3	10	3×0.62	18.6
4	10	4×0.62	24.8
5	10	5×0.62	31
6	10	6×0.62	37.2
7	10	7×0.62	43.4
8	10	8×0.62	49.6
9	10	9×0.62	55.8
10	10	9×0.62	62

4. DISPLACEMENTS OF THE CANTILEVER

Displacements of the device are achieved by the simulation modeling. As mentioned earlier, device length and thickness are fixed but the width is varied from 1 mm to 10 mm. Lead Zirconate Titanate (PZT-5H) is selected as the device material. After designing the device, a list of voltages is applied. The voltages ranged from 5V to 40V with 5V increment, i.e. 5V, 10V, 15V to 40V sequentially.

These applied voltages create piezoelectric effect eventually and the effect can be found in displacement form. Ideally, higher voltage should result larger displacements. However, in several cases, lower voltage introduces higher displacement (case 3, 6 and 10). Reasonably, this incident depends on the operating resonant frequency of the cantilever.

Maximum displacement is found in case 1 with the device dimension of 10×1×0.62 mm. The measured displacement is 9.80E-28 mm when 40V is applied. Case 7 and 10 exhibit the next higher displacements with 7.79E-32 mm and 2.55E-29 mm values when 35V is applied for both cases. Interestingly, case 10 designs a square cantilever where case 7 has the rectangular shape. Among others, case 5 has the higher displacement as 7.85E-30 mm with 40V applied voltage.

From the results in Table 2 and Figure 2 and Figure 3, we can observe some obvious conclusions. In the context of displacement, case 1 is the dominating device pattern. However, for acoustic propagation pattern and signal power level, case 7 and 10 are better choices due to their device size.

In addition, nonuniform stress distributions are also found in some cases (case 4, 5, 7 and 8). These nonuniform stress distributions have inverse effect on the device behavior. Specifically, when found on the device tip, it can exhibit nonlinear, even reverse displacement patterns. This leads to the uncontrolled acoustic propagation and direction. In progression, it may introduce to the device failure or breakdown. Maximum displacements of the cantilever for different cases (6 - 10) as shown in Figure 4.

Table 2. Maximum Cantilever Displacements

Case	Cantilever Dimensions (mm) Length×Width×Thickness	Device Volume (mm ³)
1	9.80E-28	40
2	2.27E-33	40
3	2.43E-30	30
4	2.78E-34	40
5	7.85E-30	40
6	7.79E-32	35
7	5.15E-29	40
8	3.59E-35	40
9	3.21E-30	40
10	2.55E-29	35

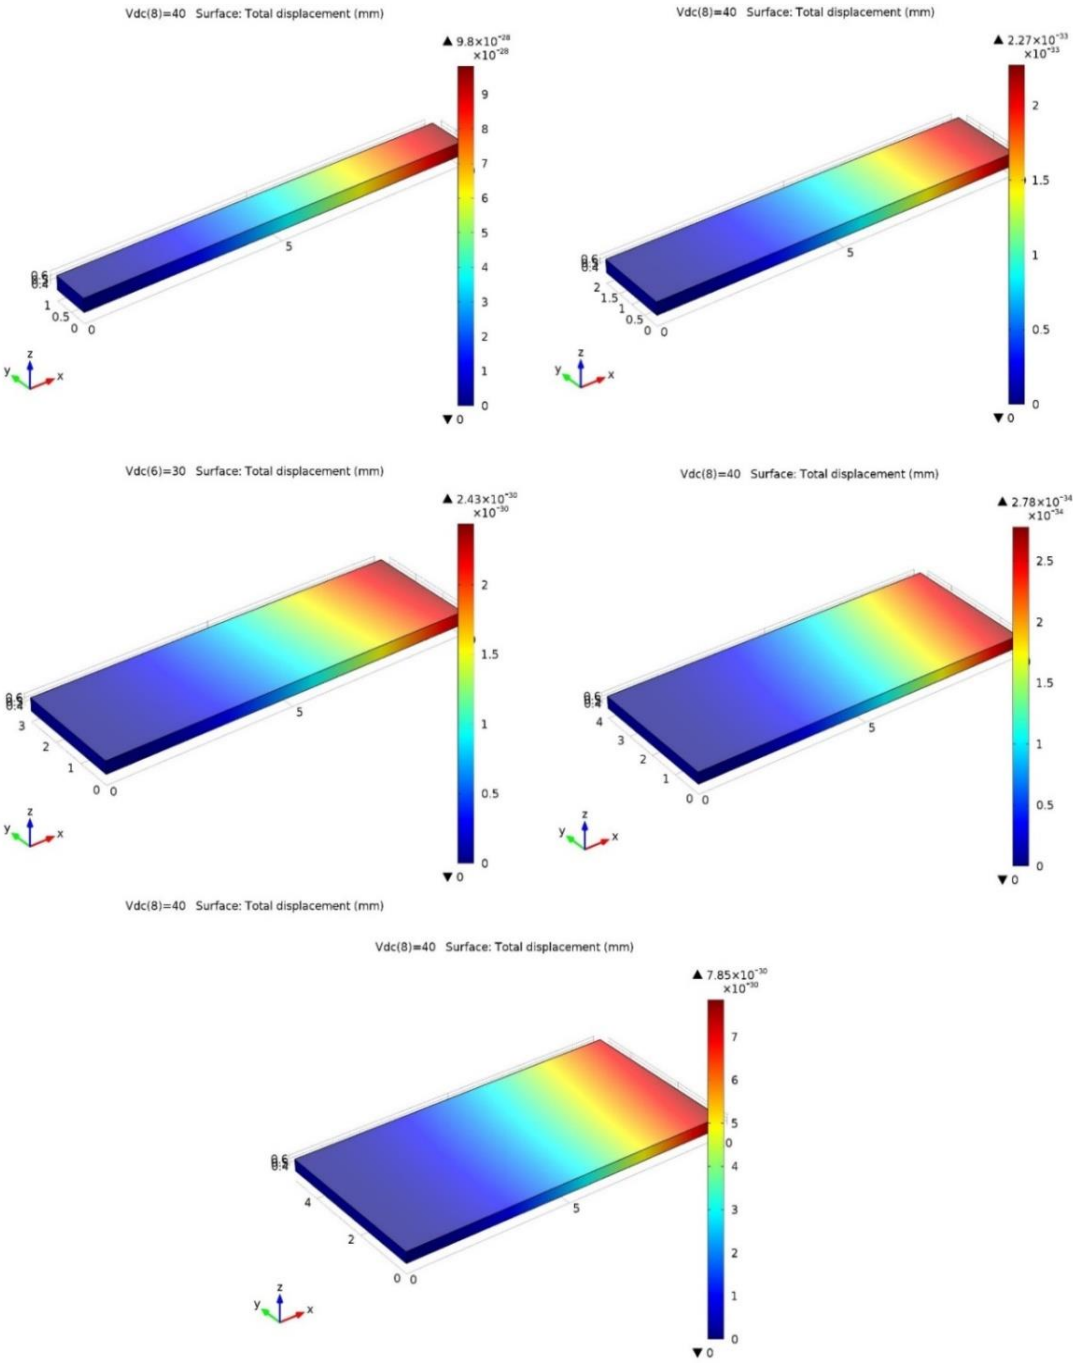


Figure 3. Maximum displacements of the cantilever for different cases (1 - 5)

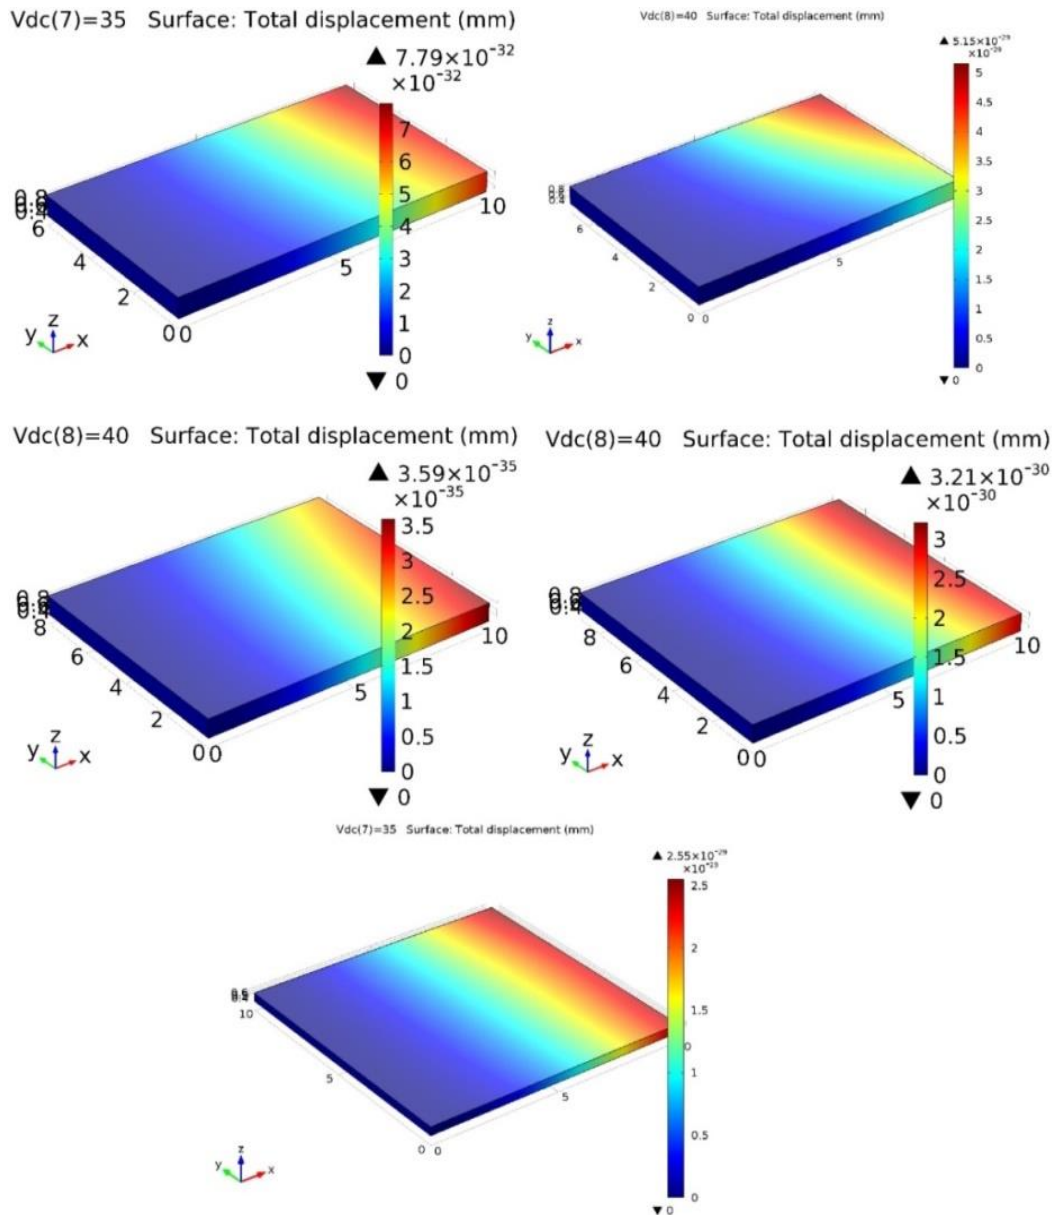


Figure 4. Maximum displacements of the cantilever for different cases (6 - 10)

5. CONCLUSION

The effect of device width of a piezoelectric cantilever on the displacement pattern is presented in this paper. The length and thickness of the device is fixed to the values of 10 mm and 0.62 mm. However, the width is varied from 1 mm to 10 mm sequentially. Displacement measurements for each case are presented. From the results, it is obvious that, this changed geometry caused the nonlinear displacement patterns. The largest displacement of 9.80×10^{-28} mm is found with smallest cantilever width of 1 mm. However, the smallest displacement of 3.59×10^{-35} mm is found from 8 mm width. Interestingly, better displacements can be achieved with 7 mm and 10 mm widths compared to others. Among other width measurements, 7.85×10^{-30} mm displacement is found with 5 mm. For most cases, larger applied voltage caused higher displacements. However, in 3 cases lower voltages offer higher displacements. Hence, it is to conclude that, from this study, we found that, usually smaller width produces larger displacement. However, length and width ration cannot be justified accordingly as 7 mm and 10 mm widths measure better than rest of the width measurement.

In this paper, simulation measurement of the cantilever width is presented. The testing of the proposed cantilever in true environment is our next research agenda.



ACKNOWLEDGEMENTS


This work is partly supported by the Research Management and Innovation Centre of Universiti Malaysia Perlis, under fundamental research grant scheme (FRGS 9001-00569), Government of Malaysia.

REFERENCES

- [1] M. E. Motamedi, MOEMS: micro-opto-electro-mechanical systems, *SPIE Press*, vol. 126, 2005.
- [2] S. Nabavi, and L. Zhang. "MEMS piezoelectric energy harvester design and optimization based on Genetic Algorithm." *In International Ultrasonics Symposium (IUS)*, IEEE, pp. 1-4, 2016.
- [3] T. Tan, Z. Yan, H. Lei, and W. Sun. "Geometric nonlinear distributed parameter model for cantilever-beam piezoelectric energy harvesters and structural dimension analysis for galloping mode." *Journal of Intelligent Material Systems and Structures*, vol. 28, no. 20, pp. 3066-3078, 2017.
- [4] X. Li, W. Y. Shih, I. A. Aksay, & W. H. Shih, "Electromechanical Behavior of PZT-Brass Unimorphs", *Journal of the American Ceramic Society*, vol. 82, no. 7, pp. 1733-1740, 1999.
- [5] M. R. Awal, M. Jusoh, T. Sabapathy, M. R. Kamarudin, R. A. Rahim, & M. F. A. Malek, "Power harvesting using dual transformations of piezoelectricity and magnetism: A review", *12th IEEE Student Conference on Research and Development (SCORED)*, IEEE, pp. 527-532, 2015.
- [6] U. Rabe, and W. Arnold. "Acoustic microscopy by atomic force microscopy." *Applied Physics Letters*, vol 64, no. 12, pp. 1493-1495, 1994.
- [7] M. R. Awal, M. Jusoh, T. Sabapathy, M. R. Kamarudin, H. A. Rahim, & M. F. A. Malek, "Analysis of a hybrid wireless power harvester for low power applications", *In 10th European Conference on Antennas and Propagation (EuCAP)*, Davos, Switzerland, pp. 1-5, 2016.
- [8] M. R. Awal, M. Jusoh, T. Sabapathy, M. R. Kamarudin, & R. A. Rahim, "State-of-the-Art Developments of Acoustic Energy Transfer", *International Journal of Antennas and Propagation*, pp. 1-14, 2016.
- [9] A. G. Krause, M. Winger, T.D. Blasius, Q. Lin, O. Painter, "A microchip optomechanical accelerometer", *Nature Photonics*, vol. 6, pp. 768-772, 2012.
- [10] W. C. Tang, T-CH Nguyen, and R. T. Howe, "Laterally driven polysilicon resonant microstructures", *Sensors and Actuators*, vol. 20, pp. 25-32, 1989.
- [11] K. F. Wang, and B. L. Wang. "Energy gathering performance of micro/nanoscale circular energy harvesters based on flexoelectric effect." *Energy*, vol. 149, pp. 597-606, 2018.
- [12] Q. Deng, and S. Shen. "The flexodynamic effect on nanoscale flexoelectric energy harvesting: a computational approach." *Smart Materials and Structures*, vol 27, no. 10, pp. 105001(1-15), 2018.
- [13] M. M. Jazi, M. Ghayour, S. Ziaei-Rad, and E. M. Miandoab. "Effect of size on the dynamic behaviors of atomic force microscopes." *Microsystem Technologies* 24, no. 4, pp. 1755-1765, 2018.
- [14] M. TK Hou, and R. Chen. "Effect of width on the stress-induced bending of micromachined bilayer cantilevers." *Journal of Micromechanics and Microengineering*, vol. 13, no. 1, pp 141, 2002.
- [15] R. G. Ballas, "Piezoelectric multilayer beam bending actuators: static and dynamic behavior and aspects of sensor integration", *Springer Science & Business Media*, 2007.
- [16] E. Finot, A. Passian, and T. Thundat. "Measurement of mechanical properties of cantilever shaped materials." *Sensors*, vol 8, no.5, pp 3497-3541, 2008.

BIOGRAPHIES OF AUTHORS

	<p>Md Rabiul Awal has received the B.Sc. in Electrical & Electronics Engineering from International Islamic University Chittagong (IIUC), Bangladesh and Master in Computer Science from International Islamic University Malaysia (IIUM), Malaysia in 2011 and 2015 respectively. He has earned his PhD in Communication Engineering from Universiti Malaysia Perlis (UniMAP), Malaysia, in 2018. From 2011 to 2012, he was working as RF Engineer in 3S Network (BD) Ltd. and from 2013 to 2015 he worked as research assistant in IIUM and UniMAP. So far, he has published 6 journal articles, 3 chapter in proceeding books and 11 conference proceedings papers. His research interests include wireless power transfer, energy harvesting, 3-D wireless charging.</p>
	<p>Muzammil Jusoh is currently working with Universiti Malaysia Perlis (UniMAP) as an Associates Professor and researcher based in School of Computer and Communication Engineering (SCCE). Experienced as RF and Microwave Engineer for Telekom Malaysia Berhad (TM) Company from 2006-2009 which used to be engineer (team leader) of Specialized Network Services (SNS) Department based in TM Senai Johor. Do preventive and corrective maintenance of ILS, NDB, DVOR, repeater, microwave system, VHF and UHF based on contract wise; Department Civil Aviation (DCA), TUDM, PDRM, ATM, Tanjong Pelepas Port (PTP), MCMC and JPS (Hidrologi Dept.). He has received PhD in Communication Engineering from UniMAP in 2013. While received MsC. (2010) in Electronic Telecommunication Engineering and Bachelor Degree (2006) in Electrical-Electronic and Telecommunication Engineering from Universiti Teknologi Malaysia (UTM).</p>

	<p>He holds an H-Index of 13 (SCOPUS) and has published over 132 technical papers in journals and proceedings including the IEEE Access, IEEE Antenna and Wireless Propagation Letter (AWPL), Microwave and Optical Technology Letter (MOTL), International Journal on Antenna and Propagation (IJAP), Progress in Electromagnetics Research (PIER) and Radio Engineering Journal and more than 50 conference papers. His research interests include antenna design, reconfigurable beam steering antenna, wearable antenna, MIMO, UWB, wireless on-body communications, in-body communications (implantable antenna), wireless power transfer, RF and microwave communication system. Currently, supervising a number of PhD and MSc students and also managing few grants under Ministry of Higher Education Malaysia. Moreover, Dr Muzammil is an IEEE Member (MIEEE), a Member of IET (MIET), a Member of Antenna and Propagation (AP/MTT/EMC), Malaysia Chapter, and has received his Chartered Engineering on July 2017</p>
	<p>IR. R. Badlishah Ahmad obtained B.E. in Electrical and Electronic Engineering from Glasgow University in 1994. He obtained his M.Sc. and Ph.D. in 1995 and 2000 respectively from University of Strathclyde, UK. His research interests are on computer and telecommunication network modeling using discrete event simulators, optical networking and coding, and embedded system based on GNU/Linux for vision. He has five (5) years teaching experience in University Sains Malaysia. Since 2004 until 15 March 2017, he was working with University Malaysia Perlis (UniMAP) as Dean at School of Computer and Communication Engineering. Currently as the Deputy Vice Chancellor (Research and Innovation), Universiti Sultan Zainal Abidin (UniSZA).</p>
	<p>Thennarasan Sabapathy, Ph.D received his B.Eng. degree in Electrical Telecommunication Engineering from the Universiti Teknologi Malaysia, in 2007 and M. Sc. Eng. degree in Multimedia University, Malaysia in 2011. He pursued his PhD in Communication Engineering from University Malaysia Perlis in 2014. In 2007, he served as Test Development Engineer in Flextronics, working on the hardware and software test solutions for the mobile phone manufacturing. Then he joined Multimedia University as Research Officer from 2008 to 2010 while pursuing his M. Eng. Sc. From 2012 to 2014, he was a research fellow in University Malaysia Perlis during his PhD. He is currently a Senior Lecturer at the School of Computer and Communication Engineering (SCCE), Universiti Malaysia Perlis. His current research interests include antenna and propagation, millimeter-wave wireless communications and fuzzy logic for wireless communications.</p>